





### **OVERALL CONSTRUCTION**

Systec's CTD features a fully guarded chain to all exposed areas. The small diameter, maintenance free sprockets minimize the distance between the feeding conveyor and the CTD itself, limiting load hangup.



### **ADJUSTABILITY**

Systec's CTD chain bars are adjustable on 3" increments. The device can be installed at various locations within a conveyor line.



### **DRIVE ASSEMBLY**

Systec's CTD drive is a direct shaft to drive sprocket assembly, and tucked neatly into the framework of the device - no chain and sprocket drive assembly.

## *CHAIN TRANSFER DEVICE*



### **DESCRIPTION**

Systec's Chain Transfer Device (CTD) is a safe and efficient method of moving loads onto and/or off of a conveyor line.

The features of Systec's CTD allow it to sit within the conveyor line at various locations. It can be moved to nearly any location within the length of the conveyor line. It is totally independent of the conveyor in which it rests, and can be added to most other conveyor equipment manufacturer's lines. The CTD is capable of being added to either, Powered Accumulating Roller conveyor (PAR), Powered Roller Only conveyor (PRO), or Gravity Roller Conveyor (GRC). Additionally, the CTD's chain bars are fully adjustable on a 3" increment to meet any changes in production or configuration requirements.

Based on the application, through optional load controls, loads can enter or discharge the device. Within certain applications, the device can act as a one, two, three, or four way intersection.

As with all Systec conveyor and devices, the CTD chain bars are all-welded steel construction, using precision laser cut and machined parts for exact fit and function. This is a very low maintenance device applying the most advanced safety designs and features.

# CHAIN TRANSFER DEVICE (CTD)

# CHAIN TRANSFER DEVICE (CTD)

## SPECIFICATIONS



Fits Between Frame Dimension	48", 60", 72", 84", 96"
Device Lengths	4'-0" thru 13'-0" on 1'-0" increments
Top-of-Roller Height	12" T.O.R. Standard (heights over 12" available)
Drive Capacity	3,500lb/unit
Conveyor Speeds	30, 40, and 60 FPM
Motor	Flange Mounted, 3/4HP, 230/460volt, 3-Phase, 60 Hertz, Standard
Air Requirement	80 PSI

## CONSTRUCTION

Chain Bar	Laser cut and welded steel construction
Chain Bar Mounting	Telespar Tube, 1" Adjustability (3" for roller centers)
Chain Guide	Rivet Mounted UHMW Plastic Chain Rail
Chain	#60 Heavy Duty Chain
Sprocket	13 Tooth, with Precision Bearing Insert (no bushings)
Shaft	1" Diameter Idler and Drive Shaft
Bearing	1" Diameter, Sealed-for-Life, Flange Mount

## CONTROL OPTIONS

Automatic	Positioning Controls with Electro-mechanical Sensor Actuation
Safety Controls	Automatic Collision Safety
Priority Entry	Automatic Load Entry from Perpendicular Conveyor
Manual	Pushbutton Operation

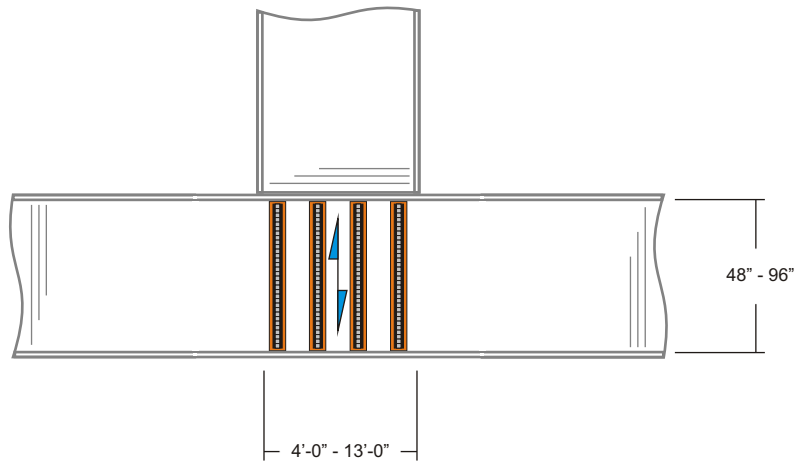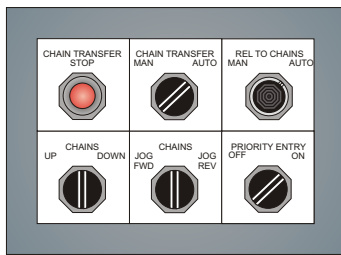

*The Leader in Conveyor Innovation!*

10010 Conveyor Drive - Indianapolis, IN 46235  
 Tel: 317-890-9230 / 800-578-1755 Fax: 317-890-9232  
 www.systecconveyors.com

